

ref. 99054193

HYDRAULIC POWER PACK SR 20 PC 2 E

POMPEN

Operation: petrol engine
Connection type: core
Number of stages: 3
Hydraulic oil tank capacity (effective): 4000 cc
Number of tools usable at the same time: 2
With ECO whisper mode

DESCRIPTION
Compact petrol twin pump, CORE version, for simultaneous operation of 2 tools (MTO). Equipped with ECO whisper mode.
Large hydraulic oil capacity, enough oil to operate 2 rescue tools simultaneously, including the largest rams.
3-stage pump, which provides much higher output/speed in 2nd stage on the one hand and lower output/speed in 3rd stage on the other hand for more tool control.

TECHNICAL SPECIFICATIONS
- 3-stage pump
- Central carrying handle, soft grip
- Steel frame around motor and pump
- Engine oil sensor: automatic shutdown if engine oil level is too low
- Sight glass: quick and easy checking of the oil level from the outside of the pump
- Eco mode possible: When the tool is no longer in use, the engine speed returns to rated speed, minimising noise and fuel consumption.

- Operation: petrol engine
- Engine: 4-stroke, Honda GX100 (3.1 hp, 2.3kW)
- Pump type: 2x 3-stage axial piston pump
- Number of stages: 3
- Max working pressure: 720 bar
- First stage: 0-150 bar // 2900 cc/min
- Second stage: 150-280 bar // 1300 cc/min
- Third stage: 280-720 bar // 550 cc/min

Vanassche Firefighting Engineering
Brugsesteenweg 8
B-8531 Harelbeke
+32 (0) 56 710 130
info@vanassche-fire.be
BE 0415.345.684
RPR Gent - Afdeling Kortrijk
vanassche-fire.be


Vanassche Services
Brugsestraat 153
B-8531 Harelbeke
+32 (0) 56 738 188
services@vanassche-fire.be
BE 0473.397.315
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

- Connection type: core
- Oil tank capacity (effective): 4000 cc
- Oil tank capacity: 4340 cc
- Autonomy: 7.2 hours
- Fuel tank capacity: 1700 cc
- Number of tool connections: 2
- Number of tools that can be used at the same time: 2
- Noise emission (according to EN 13204): 85 dB(A)
- Noise emission (no load): 78 dB(A)
- Dimensions: 455 x 315 x 460 mm
- Weight: 23.6 kg
- Standard EN 13204: MTO
- NFPA 1936 Standardisation: yes

ACCESSORIES
- 99049504: quick fix and release bracket
- 99049505: angle plate quick fix and release bracket
- 99046396: LED lighting unit
- Core elbow piece







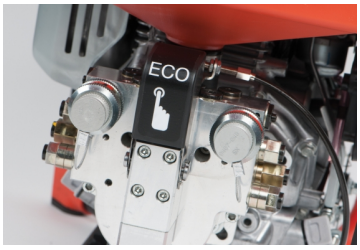





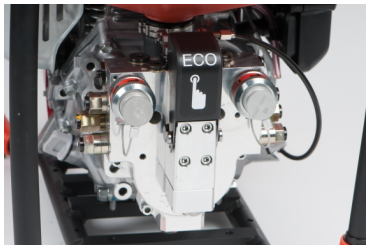

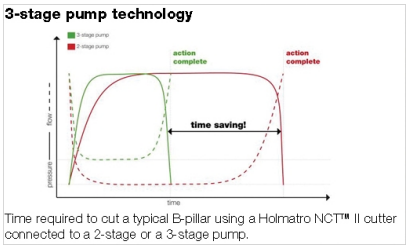

Time required to cut a typical B-pillar using a Holmatro NCT™ II cutter connected to a 2-stage or a 3-stage pump.

Vanassche Firefighting Engineering
Brugsesteenweg 8
B-8531 Harelbeke
+32 (0) 56 710 130
info@vanassche-fire.be
BE 0415.345.684
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

Vanassche Services
Brugsestraat 153
B-8531 Harelbeke
+32 (0) 56 738 188
services@vanassche-fire.be
BE 0473.397.315
RPR Gent - Afdeling Kortrijk
vanassche-fire.be