

ref. 99015036

LANCE HS 12 2 "M + DSP45

STRAALPIJPEN DIVERS

Compact

Flow rate: full jet 230 l/min ((at 6 bar), spray jet 460 l/min

Type of valve: swivel nozzle

Coupling: DSP 45 without bolt


DESCRIPTION

HS nozzles are easy to handle and robustly constructed. By turning the rubber coated head, you can go from closed to full blast to spray line of 0-120°.

TECHNICAL SPECIFICATIONS

- Flow rate: full jet 230 l/min ((at 6 bar), spray jet 460 l/min
- Pressure Pr: 6 bar
- Pressure Pn: 16 bar
- Type of valve: swivel nozzle
- Jet pattern: steplessly adjustable jet pattern from closed to full jet up to spray jet 0-120°
- Throw length: 28 m (full jet), 4.5 m (spray jet)
- Coupling: DSP 45 without bolt
- Dimensions: L358 x W80 x H80 mm
- Material control head: control head rubber (NBR) and chrome
- Material barrel: impact-resistant plastic
- Standardisation: EN15182 and EN 671
- Weight: 1 kg



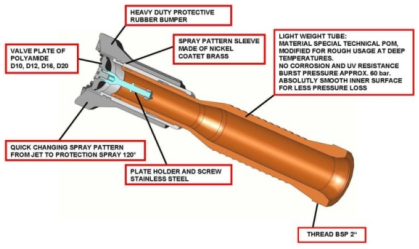

Vanassche Firefighting Engineering
Brugsesteenweg 8
B-8531 Harelbeke
+32 (0) 56 710 130
info@vanassche-fire.be
BE 0415.345.684
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

Vanassche Services
Brugsestraat 153
B-8531 Harelbeke
+32 (0) 56 738 188
services@vanassche-fire.be
BE 0473.397.315
RPR Gent - Afdeling Kortrijk
vanassche-fire.be