ref. 99069207

# COMBINATION CUTTER HCT 5111 CORE

## COMBITOOLS

Connection type: Core

Spread: 281 mm

Max spreading force: 457 kN (46.6 tonnes)

Theoretical cutting force: 268 kN (27.3 tonnes)

Weight: 8 kg

DESCRIPTION

To spread, cut, pinch and pull with one tool.

TECHNICAL SPECIFICATIONS

- Operating handle with improved grip
- I-Bolt Technology: Flatter design for better access to confined spaces
- Integrated LED lighting in carrying handle (6 LEDs)
- 360° access to operating handle

- Max working pressure: 720 bar
- Spread: 281 mm
- Max spreading force: 457 kN (46.6 tonnes)
- Min spreading force (EN 13204): 48 kN (4.9 tonnes)
- Max pinch force Sq1: 44 kN (4.5 tons)
- Max knife opening: 196 mm
- Theoretical cutting force: 268 kN (27.3 tonnes)
- Required oil content (effective): 55 cc
- Connection type: Core
- Degree of protection: IP68
- Dimensions: 545 x 275 x 192 mm
- Weight: 8 kg
- Standard EN 13204: BK48/281-E-8.0
- NFPA 1936 Standardisation: yes
- Standard EN 13204 cutting capacity: 1E 2E 3E 4E 5E

**Vanassche Firefighting Engineering**
Brugsesteenweg 8
B-8531 Harelbeke
+32 (0) 56 710 130
info@vanassche-fire.be
BE 0415.345.684
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

**Vanassche Services**
Brugsestraat 153
B-8531 Harelbeke
+32 (0) 56 738 188
services@vanassche-fire.be
BE 0473.397.315
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

- Standard NFPA 1936 cutting capacity: A5 B5 C5 D6 E4
- NFPA 1936 Standardisation: HSF 52 kN / LSF 40 kN
- Cutting performance round steel (S235 according to EN 13204): 24 mm

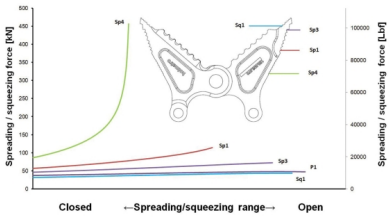


**Vanassche Firefighting Engineering**
Brugsesteenweg 8
B-8531 Harelbeke
+32 (0) 56 710 130
info@vanassche-fire.be
BE 0415.345.684
RPR Gent - Afdeling Kortrijk
vanassche-fire.be

**Vanassche Services**
Brugsestraat 153
B-8531 Harelbeke
+32 (0) 56 738 188
services@vanassche-fire.be
BE 0473.397.315
RPR Gent - Afdeling Kortrijk
vanassche-fire.be